

Model: VBD -012-300VTD52J2V2

Input Voltage:	100 – 277V AC
Input Current at Max Load:	3.6 A
Frequency:	50/60 Hz
Output Voltage:	12V DC
Output Current:	5 A (5x5 A)
Max Power:	300 W (5x60 W)
Dimensions L x W x H:	440 x 86 x 60 mm
Class Certification:	Class 2/Class P/Type HL
Weight:	2.874 kg
IP Rating:	IP67 (Dry, Damp and Wet Locations)
Dimmable:	Triac/0/1-10V (5 in 1 Dimming)
Wiring/Housing:	Hardwire
Operating Temperature:	at least 90°C
Standards:	FC/UL/RoHS

ORDER INFORMATION

Please fill out the below interactive form and press the **SUBMIT** button to send it electronically.

Name: _____

Project Name: _____


Email: _____

Phone: _____


Quantity: _____

Notes: _____

Installation Diagram (with 0-10V Dimmers)


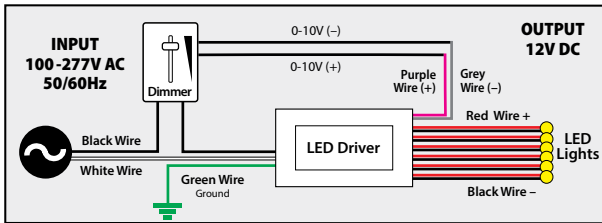


(with Triac and Phase-cut Dimmers)

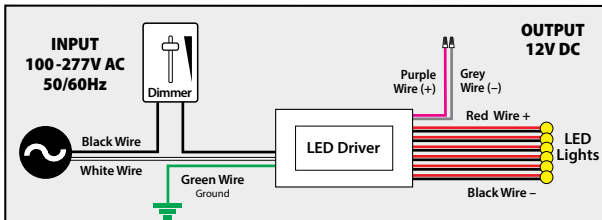

Dimming

Veroboard 5 in 1 Dimming Constant Voltage LED drivers work with any standard Leading Edge, MLV, TRIAC or 0-10V dimmers. The dimmer switch must be installed on the 120V AC side of the driver.

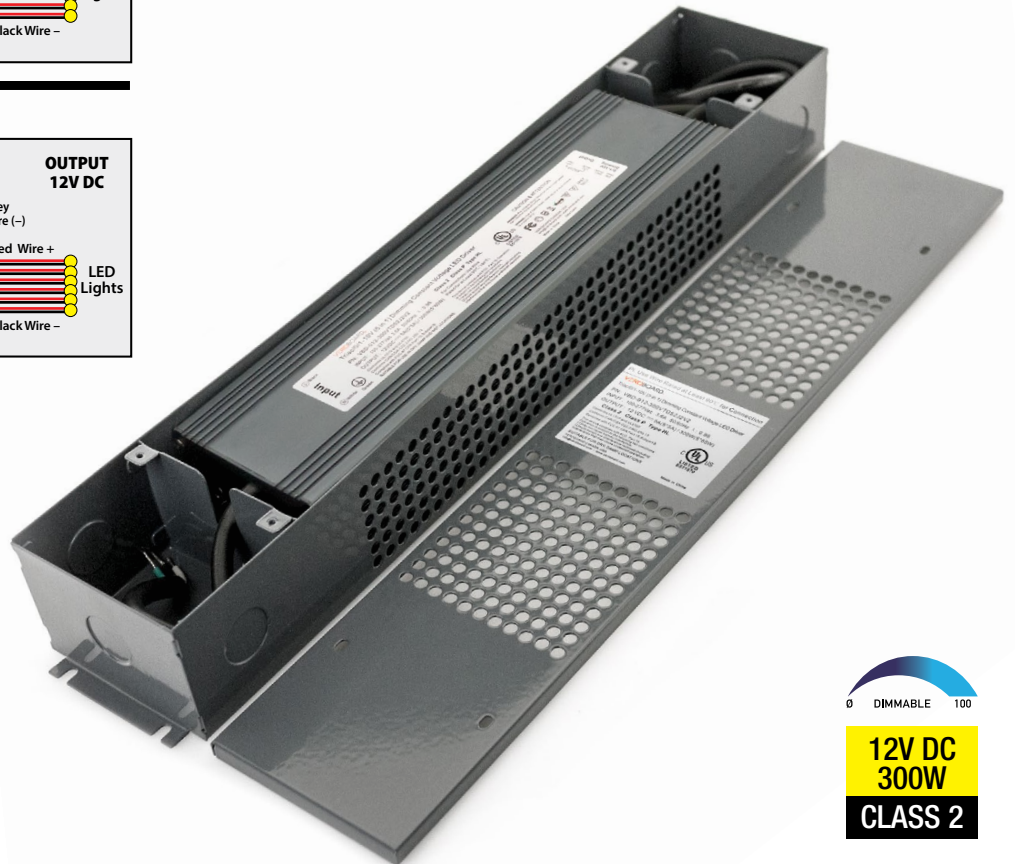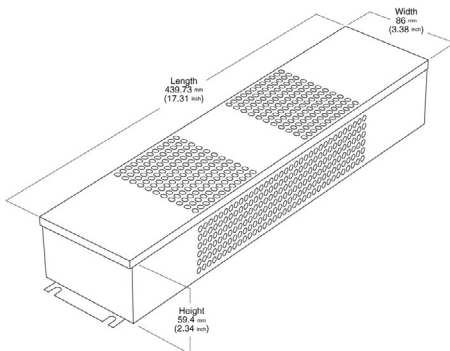

12V DC
300W
CLASS 2

SKU: 666561419271