

## Model: VBD-024-150DM

<b>Input Voltage:</b>	100-130V AC
<b>Input Current at Max Load:</b>	2.39 A
<b>Frequency:</b>	47-63 Hz
<b>Output Voltage:</b>	24V DC
<b>Output Current:</b>	6.25 A
<b>Max Power:</b>	150 W
<b>Dimensions L x W x H:</b>	392 mm x 87 mm x 60 mm
<b>Weight:</b>	2.28 kg
<b>IP Rating:</b>	IP67 (Dry, Damp, and Wet Locations)
<b>Dimmable:</b>	Triac/ Phase-cut Dimming
<b>Wiring/Housing:</b>	Hardwire
<b>Operating Temperature:</b>	at least 90°C
<b>Standards:</b>	FC/UL/RoHS

## ORDER INFORMATION

Please fill out the below interactive form and press the **SUBMIT** button to send it electronically.

**Name:** \_\_\_\_\_

**Project Name:** \_\_\_\_\_


**Email:** \_\_\_\_\_

**Phone:** \_\_\_\_\_

**Quantity:** \_\_\_\_\_


**Notes:** \_\_\_\_\_

## Installation Diagram

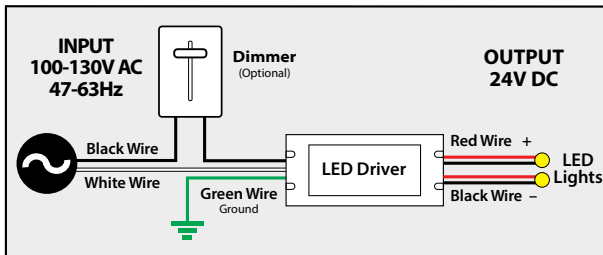

## Dimming

Veroboard Phase Cut Dimming Constant Voltage LED drivers work with any standard Leading Edge, MLV, or TRIAC dimmers. The dimmer switch must be installed on the 120V AC side of the driver.

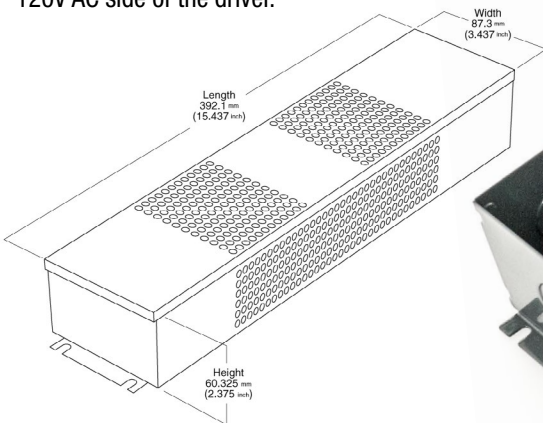

**24V DC**  
**150W**

**SKU: 666561415792**