

## CV 0-10V Dimmable LED Driver

<b>Model No:</b>	OTM-TD20-24
<b>Input Voltage:</b>	100-130V AC
<b>Input Current:</b>	0.24A
<b>Frequency:</b>	50-60 Hz
<b>Output Voltage:</b>	24V DC
<b>Output Current:</b>	830mA
<b>Max Power:</b>	19.92W
<b>Efficiency:</b>	$\eta > 80\%$
<b>Power Factor:</b>	$PF > 0.95$
<b>Dimensions:</b>	$\varnothing 66.16 \text{ mm} \times 20.15 \text{ mm Depth}$
<b>Class Certification:</b>	Class II
<b>Ambient Temperature (Ta):</b>	40°C
<b>Case Temperature (Tc):</b>	80°C
<b>IP Rating:</b>	IP20
<b>Dimmable:</b>	0/1-10V Dimming
<b>Wiring/Housing:</b>	Hardwire
<b>Standards:</b>	ETL/RoHS

### ORDER INFORMATION

Please fill out the below interactive form and press the **SUBMIT** button to send it electronically.

**Name:** \_\_\_\_\_

**Project Name:** \_\_\_\_\_

**Email:** \_\_\_\_\_


**Phone:** \_\_\_\_\_

**Quantity:** \_\_\_\_\_

**Notes:** \_\_\_\_\_




### Installation Diagram

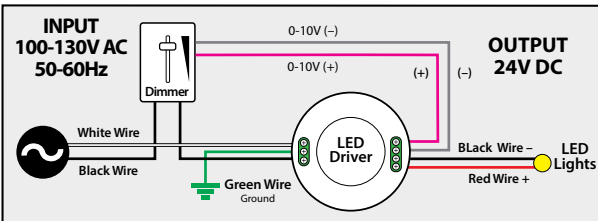

### 0-10V Dimming

Veroboard 0-10V Dimming Constant Voltage LED Driver works with 0/1-10V dimmers. The dimmers use a low voltage 0-10V DC signal connected to the LED power supply.

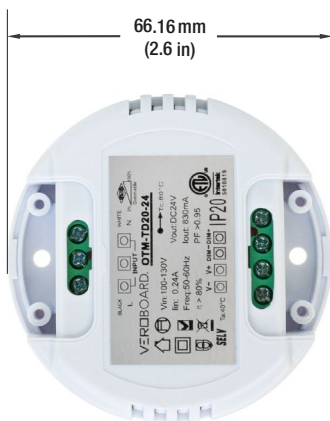

**24V DC**  
**19.92W**

**CLASS II**

**SKU: 666561425524**